



# 2U SLIDING PATCH PANEL WITH 6 LGX SLOTS

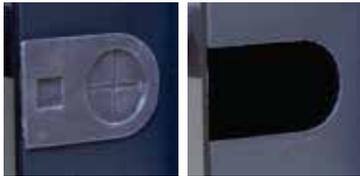


Front cable opening (with and without grommet)

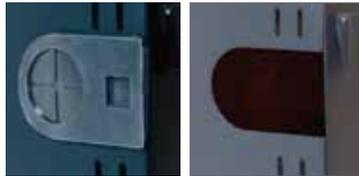


Rear cable opening (with and without grommet)


Front View



Top View

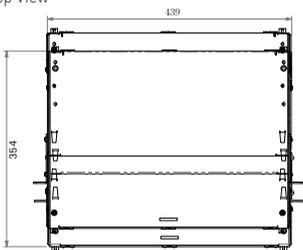

Side View

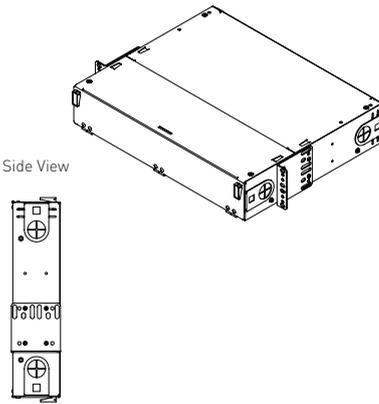

FIBER-REX offers an innovative, robust, 2U sliding panel with a smoked plexi-glass hinged front door. This panel has been designed to accept up to 6 LGX-style assemblies.

The panel can use a full array of adapter types, offering a flexible solution to the end user. The multifunctional chassis permits easy access during installation and re-work without disturbing existing cable or fibers. The side fiber cable entry design allows the user to completely lock both front plexi-glass and rear hinged doors.

In addition to its versatility in adapter types, the panel also offers multiple cable entry solutions. It can accept MTP trunk cables connected to 6 individual MTP cassettes (max. 24 fibers per cassette) or loose tube cables to be spliced into standard splice cassettes. Thus, our panel allows standard splicing or pre-terminated assembly solutions, making this 2U panel one of the most flexible on the market.

## ★ Features

- Special designed bracket fits either 19" or 23" rack
- Accepts any 6 combinations of LGX-style adapter plates or MTP cassettes
- Up to 6x 24 fiber MTP cassettes
- Multiple adapter options available
- Integrated spring-loaded tray stop
- Easily operated from either front or rear sides
- Splicing option available
- Side fiber cable entry
- Hinged front plexi glass door
- Removable top cover
- Complete lock system
- Compliant to RoHS, REACH SvHC

## ✔ Applications

- Data centers, premise installations, telecommunication networks
- Ethernet, Fiber Channel, ATM, LAN, MAN and WAN
- Data communication
- Indoor applications

## ⚙️ Technical Specification

Parameter	Value
Height	2U (88.9mm)
Width	432mm
Depth	356mm
Net weight (per piece)	7.67kg
Gross weight (per piece)	8.17kg
Packaged dimensions	500mm(W) x430mm(L)x150mm(H)
Suitable for adapter type	LGX / MTP Cassettes
Number of LGX module ports	6
Material	Cold- rolled steel
Material coating	Powder coating
Material thickness	1.2mm
Color	RAL 9004
Operating temperature	-40°C to +60°C
Compliant to	RoHS, Reach/SvHC

## 🛒 Ordering Information

Part No.	Description
FR-AM2U	AM 2U Style Sliding Patch Panel, Unloaded